

**SKYTEC®****FRISCO™**

## UNSUPPORTED NITRILE GAUNTLET

Chemical resistant gauntlet with a textured pattern on the palm. Flock-lined for extra comfort.

### FEATURES

- › Flock-lined for extra comfort and ease of donning
- › Textured palm and fingertips for gripping in wet and dry conditions
- › Resistant to a wide variety of chemicals and solvents
- › EN374 and Category III approved
- › Chlorinated and sanitised to reduce odours
- › Straight cuff
- › Blue colouring
- › Length: 330mm

**i-con™**  
Glove SystemFor further information please visit [www.globus.co.uk/icon](http://www.globus.co.uk/icon)

### SUITABLE FOR


#### Typical Industries

- Agriculture
- Automotive
- Chemical
- Facility Management
- Oil and Gas
- Repair and Refurbish

#### Suitable Applications

- Chemical Handling
- Cleaning
- Commercial Printing
- Paintshop
- Pesticide Handling

### CERTIFICATION

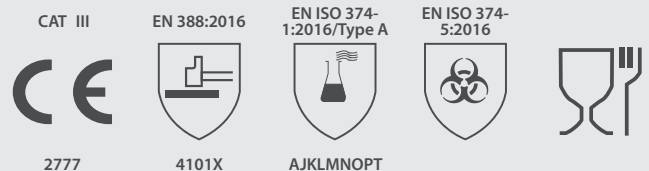

See overleaf for explanation

**SKYTEC®****FRISCO™****PRODUCT INFORMATION**

<b>MATERIALS</b>	LINER:	Cotton Flock
	COATING:	Nitrile
<b>COLOUR</b>	Blue	
<b>LENGTH (mm)</b>	330	
<b>CUFF STYLE</b>	Gauntlet	

**ORDERING DETAILS**

SIZE	CODE	PACKAGING
6/XS	SKY950	10 pairs per bag 120 pairs per case
7/S	SKY951	
8/M	SKY952	
9/L	SKY953	
10/XL	SKY954	

**RECOMMENDATIONS FOR USE**

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

**CERTIFICATION LEGENDS****MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\***

0-4	0-5	0-4	0-4	A-F	P
Abrasion Resistance	Circular Blade Cut Resistance	Tear Resistance	Puncture Resistance	Straight Blade Cut Resistance (EN ISO: 13997)	Impact Resistance

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

**PROTECTION AGAINST MICRO-ORGANISMS EN 374-5**

VIRUS = Glove has passed ISO 16604:2004 (method B)

**FOOD CONTACT DIRECTIVE EC 10/2011****RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016**

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid	C	≥10 min for at least 1 chemical
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

**EUROPE**[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

**MIDDLE EAST AND AFRICA**[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2021 Globus (Shetland) Ltd | SKY-DATA-FRISCO-0621\_1